




RF3405E Wireless (RF) Inertia Transmitter

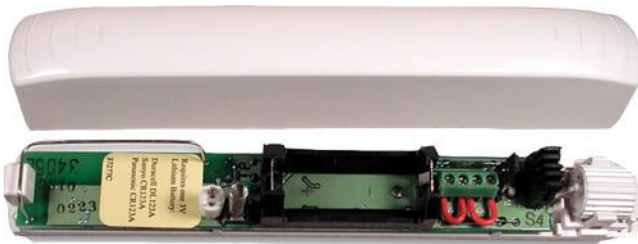

- ▶ Internal magnetic reed switch
- ▶ Supervised external loop
- ▶ Gross or minor attack movement settings
- ▶ Test mode

The RF3405E is a wireless transmitter with an inertia sensor, reed switch, and supervised external contact input. It is used for monitoring doors, windows, or other dry contact devices.

Functions

Supervised External Loop

Supervision is provided by transmitting a signal to the receiver every 13 minutes if there is no other activity.

Gross or Minor Attack Movement Settings

Program the minor attack settings to react after four or eight repetitive pulses. If gross attack is enabled, the inertia sensor only reacts to major attack movement. The gross attack movement has four sensitivity settings.


Test Mode

Once the detector is mounted, you can place it in test mode. Separate test modes verify the gross attack or minor attack movement settings. During the testing time, the LED flashes twice each time a magnetic contact changes state or the external contact changes state.

System Overview

The RF3405E has an inertia sensor with programmable sensitivity settings. You can set the transmitter to monitor the inertia sensor or external loop. Internal reed switches can also accept a dual EOL resistor supervised dry contact input from an external device. You can enable or disable the reed switch. A cover and wall tamper switch is provided. All transmissions from the RF3405E send battery status information.

Certifications and Approvals

Listings and Approvals 

Installation/Configuration Notes

Mounting Considerations

- The maximum range of the inertia transmitter, in open air, is approximately 300 m (984 ft). Keep this transmitter within 100 m (328 ft) of the receiver to which it is assigned.
- Mounting the inertia transmitter on metal surfaces might reduce its RF range. Mounting it on iron or steel surfaces might affect the operation of the internal magnetic contact.

- Mount the inertia transmitter on the door or window frame and mount the magnet assembly on the moving portion.

Compatibility Information

Receiver	Control Panels
RF3227E	D7240, D7220, D6412, and D4412

Recommended Batteries

The following battery types are recommended for correct operation of your transmitter: Duracell® DL123A, Energizer® EL123AP, Panasonic® CR123A.

Technical Specifications

Environmental Considerations

Relative Humidity	0% to 95% non-condensing
Temperature (operating):	-20C to +60C (-4°F to +151°F)

Mechanical Properties

Dimensions

Transmitter:	2.7 cm x 2.4 cm x 16.9cm (1.1 in. x 0.9 in. x 6.7 in.)
Magnet:	1.9 cm x 1.3 cm x 16.9 cm (0.75 in. x 0.5 in. x 2.4 in.)
Supervisory Interval	13 min nominal

Power Requirements

Battery:	One 3 VDC lithium battery
Battery Life	A minimum of 3 years under normal operating conditions with recommended battery types (2 years if using the inertia sensor).

Transmission Characteristics

Frequency:	433.42 MHz
Maximum RF Power	Less than 10 mW

Trademarks

Duracell® is a registered trademark of the Gillette Company, USA, in the United States and/or other countries.

Energizer® is a registered trademark of Eveready Battery Company, Inc.

Panasonic® is a registered trademark of Matsushita Electric Industrial Co., Ltd.

Ordering Information

RF3405E Wireless (RF) Inertia Transmitter	RF3405E
---	---------

Americas:
Bosch Security Systems
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 585 223 4060
Fax: +1 800 289 0096
security.sales@us.bosch.com
www.boschsecurity.us

Europe, Middle East, Africa:
Bosch Security Systems B.V.
P.O. Box 80002
5600 JB Eindhoven, The Netherlands
Phone: +31 40 27 83955
Fax: +31 40 27 86668
emea.securitysystems@bosch.com
www.boschsecurity.com

Asia-Pacific:
Bosch Security Systems Pte Ltd
38C Jalan Pemimpin
Singapore 577180
Phone: +65 6319 3450
Fax: +65 6319 3499
apr.securitysystems@bosch.com
www.boschsecurity.com

Represented by